

# OPTIMAL DESIGN AND STRESS/STRAIN ANALYSIS OF WIND TURBINE BLADE FOR OPTIMUM PERFORMANCE IN ENERGY GENERATION VIA SIMULATION APPROACH

I. P. OKOKPUJIE<sup>1</sup>, ELIZABETH J. ETERIGHO<sup>2</sup>, I. O. ALADEGBEYE<sup>3</sup> & K. OKOKPUJIE<sup>4</sup>

<sup>1</sup>Lecturer, Department of Mechanical Engineering, Covenant University, Ota, Ogun State, Nigeria

<sup>2</sup>Senior Lecturer, Department of Chemical Engineering, Federal University of Technology, Minna, Niger State, Nigeria

<sup>3</sup>Research Student, Department of Mechanical Engineering, Covenant University, Ota, Ogun State, Nigeria

<sup>4</sup>Lecturer, Department of Electrical and Information Engineering, Covenant University, Ota, Ogun State, Nigeria

## ABSTRACT

*The blade is a significant part of a wind turbine, due to its role in the conversion process of the wind energy into mechanical energy. The blade during operation is being acted upon by different forces and pressures on high humidity, which gives rise to a high rate of failure of the blade. There is a great need to study these forces and constraints on the design shape of the material blade via a simulation approach. This research focusses on the optimal design and stress/strain analysis of a wind turbine blade for sustainable power generation. This is to enable the manufacturer and end-users of the wind turbine blade to understand how the blade material withstand the forces and pressures acting on the blade during operation in the form of displacement, stress, and strain in high humidity. The design and simulation software employed in this study is Solid Works Visualize 2018. The wind turbine blade is made of AL6061 alloy material. The blade is simulated under two forces, 1 N and 5 N, with the pressure at zero degree. The result from this analysis shows the maximum stress that causes the blade to experience failure during operation, and this failure occurs at 285.377 N/m<sup>2</sup> and 1426.83 N/m<sup>2</sup>, respectively. The result from the simulation analysis shows the specific area where the deformation process, and possible failure will occur on the blades. This paper also gives reasonable suggestion for reinforcement of the wind blade during the maintainer's section, which can be applied to achieve optimum performance of the wind turbine blade.*

**KEYWORDS:** Optimal Design, Wind Turbine Blade, Simulation & Deformation Process


**Received:** Sep 16, 2019; **Accepted:** Oct 06, 2019; **Published:** Dec 07, 2019; **Paper Id.:** IJMPERDFEB20209

## 1. INTRODUCTION

Design analysis is one of the significant steps that must be put in place during the production of any mechanical component. The Optimal designs are design methodology employed to carry out the practical design of mechanical components with specific statistical measurement. In this case study, the optimal design is applied to design a wind turbine blade. Considering the environmental situation of the low wind speed region during the energy generation is very significant. And the wind energy conversion to electricity has been proven to be environmentally friendly and free from pollutions [1]. El Mouhsine et al. [2] study the aerodynamics analysis of wind turbine blade employing the element momentum method, considering the twist angle and the chord length. The Matlab software and Reynold Average Navier Stroke (RANS) were used to analyse the data obtained from the lift and drag simulation coefficients and fluid flow of the aerofoil unit. The developed model for the aerodynamic wind blade was employed to optimize the grid and the stepping time of the operations. Schubel and Crossley [3] carried out a review describing the principles of design of wind blade with the various gravitational, centrifugal, and gyroscopic force acting on the edge during operations.

Wang et al. [4] used the finite element analysis (FEM) to develop a model to analyse the power generation from the wind. The three-dimensional model was established using parameters from geometrical analysis and parameters from the aerofoil procedure. From the study, the authors discovered that the simulation process of the model is very significant as it helps to illustrate the displacement of the fluid flow on the blade. The performance rating of a wind turbine is strongly dependent on the structural characteristics of the wind blade, the relationship between the blade and the rotor. The optimization of the coefficient of the blade power and the rotor power will lead to an economical, proficient design of the wind blade [5-6]. Every mechanical component has a life span or duration for performance characterization, which creates the need for constant assessment of the blade and all engineering materials [7]. Okokpujie et al. [8] design a 0.5 kW capacity wind turbine for a low wind speed region and the wind turbine was able to generate the specific power. From the design study, the wind turbine was able to perform as design because of the application of the aerofoil shape of the wind blade. However, the design has some challenges during the operation of the wind turbine, which, as a result of the lack of simulation analysis of the stress/strain displacement factors [9-11].

Nada and Al-Shahrani [12] researched the shape of a small wind turbine blade optimization. The study employed the flexible multibody approach, and a logical approach is formed based on a floating frame of position preparation. That includes the dynamics of the bendable blades as well as the aerodynamic loads, as shown in Figure 1. Based on a flexible multibody approach, a technique of aerofoil shape optimization was carried out for low-speed wind turbines blades. The authors concluded that at low tip-speed ratio, the adaptation of inversely tapered edges could enhance the aero-dynamical performance of the turbines.

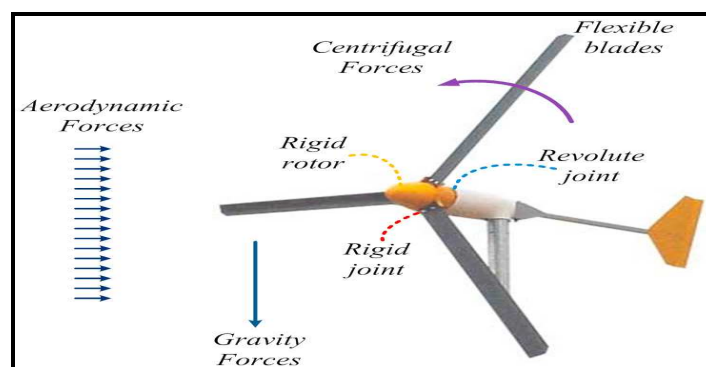

**Figure 1: The Multi-Body System showing the Load Analysis on a Small Scale Wind Turbine [12]**

Hosseini and Moetakef-Imani [13] design the horizontal wind turbine blades using computer-aided design. The design was split into two parts the structural and the aerodynamic surface, and this is to ensure excellent compatibility of the system curves. The importing functionality of the IGES standard compared with commercial CAD and FE software shows an outstanding performance of the innovative approach. And the authors recommended that this method should be employed for MW wind turbine blades designs

The deformation process of the wind blade is one of the critical aspects that need to be put into consideration [14]. Blades deformation occurs due to the forces and pressures the blade encountered during operations. The interaction between the surrounding air and the wind turbine blades is scribed by the fluid-structure interaction (FSI), which is employed to meshed the analysis together to form the model [15-18]. This process will also affect the engineering materials of the wind turbine blades during operations [19-21]. However, one significant way to study the deformation process of a wind turbine blade is to analysis the displacement, stress, and strain of the various force acting on the blade, which is the major focus of this study. This study employs the optimal design method to design the blade and carry out the deformation analysis via solid work software to understand the effects of the forces acting on the blade.

## 2. DESIGN METHODOLOGY

The optimal design of the AL6061 alloy wind turbine blade in this study is divided into three sections, such as the tip speed ratio, the aerodynamic shape, and performance efficiency. The power derived from the wind is given in equation (1). And the tip speed ratio, which defines the relative velocity of the wind and the velocity of the blade is also presented in equation (2).

$$P = \frac{1}{2} \rho A V^3 \quad (1)$$

$$\lambda = \frac{\Omega r}{V_w} \quad (2)$$

Where,  $V$  = air velocity,  $A$  = swept area,  $\rho$  = air density,  $\lambda$  = tip speed ratio,  $\Omega$  = rotational velocity (m/s),  $r$  = radius,  $V_w$  = wind speed.

The analysis of the force acting on the aerodynamic shape of the blade from the profile point of view is shown in Figure 2.

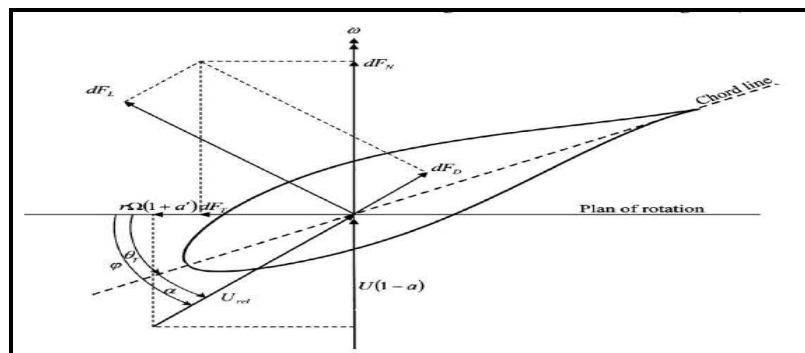


Figure 2: The Analysis of the Forces Acting on the Wind Turbine Blade via the Wind Speed

In order to design the proper shape of the wind turbine blade, the Betz method is used, which is given in equation (3) and (4). The power analyses the performance of the aerodynamic lift it yields during the generation process and is shown in equation (5) base on the drag and lift ratio.

$$C_{OPT} = \frac{2\pi r}{n} \frac{8}{9C_L} \frac{U_{wd}}{\lambda V_r} \quad (3)$$

$$\text{Knowing that: } V_r = \sqrt{V_w^2 + U^2} \quad (4)$$

Where  $r$  = radius (m),  $n$  = Blade Quantity,

$C_L$  = Lift coefficient,  $\lambda$  = Local tip speed ratio,  $V_r$  = Local resultant air velocity ( $\frac{m}{s}$ ),  $U$  = wind speed (m/s),


$U_{wd}$  = Design wind speed ( $\frac{m}{s}$ )  $C_{opt}$  = Optimum chord length

$$\text{Lift to drag ratio} = \frac{\text{Coefficient of lift}}{\text{coefficient of drag}} = \frac{C_L}{C_D} \quad (5)$$

The optimal design was used to determine the design parameters of the wind blade. Which includes the length of the blade of 2 m, the total length of the entire model is 2.76 m, the area of the blade 1.2 m, and the design perimeter is 1.27 m. Table 1 shows the volumetric and the material property of the AL6061 alloy used for this research. Table 2 gives the mass property of the design of the wind turbine blade analysis, and Figure 3 shows the various view for proper

interpretation of the wind turbine blade.

**Table 1: The Volumetric Material Properties of the AL 6061 Alloy Employed for the Simulation Study.**

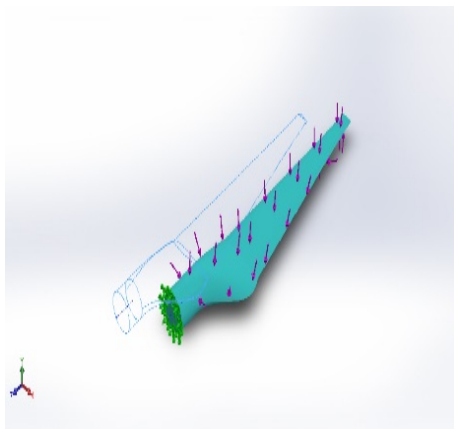Blade Reference	Properties		Components
	Material:	6061 Alloy	Solid-Body 1(Boss-Extrude1)(HAWT BLADE)
	Simulation type:	Linear Flexible Isotropic	
	Yield strength:	5.61485e+007 N/m <sup>2</sup>	
	Tensile strength:	1.2484e+008 N/m <sup>2</sup>	
	Adaptable modulus:	6.9e+010 N/m <sup>2</sup>	
	Poisson's ratio:	0.33	
	Density of the material:	2700 kg/m <sup>3</sup>	
	Volume	0.0509958 m <sup>3</sup>	
	Shear modulus:	2.6e+010 N/m <sup>2</sup>	
	Weight	1349.35 N	
	Thermal coefficient:	2.4e-005 /Kelvin	
	Mass	137.689 kg	

### The Design Mass Property for the Assembly

Configuration: Default

Coordinate systems: ---default

Mass = 137688.67 grams

Volume = 50995803.06 cubic millimeters

Surface area = 2049264.54 square millimeters

Center of mass: millimeters

X = 999,48

Y = 1476.25

Z = 2797.90

The principal axes of the inertia and moments of inertia: (grams\*square millimeter) of the design of the wind turbine blade are express below.

Taken at the center of mass

$I_x = (0.00, 0.00, 1.00)$        $P_x = 1770269738.96$

$I_y = (1.00, 0.02, 0.00)$        $P_y = 41498114138.54$

$I_z = (-0.02, 1.00, 0.00)$        $P_z = 42796165149.01$

Moments of inertia: (grams\*square millimeter),

Taken at the center of mass and aligned with the output coordinate system of the design.

$L_{xx} = 41498106046.35$      $L_{xy} = 20701743.55$        $L_{xz} = 117064077.96$

$L_{yx} = 20701743.55$        $L_{yy} = 42795708985.38$        $L_{yz} = -70023098.88$

$$L_{zx} = 117064077.96 \quad L_{zy} = -70023098.88 \quad L_{zz} = 1770733994.78$$

Moments of inertia: (grams\*square millimeter)

Taken at the output coordinate system.

$$\begin{aligned} I_{xx} &= 1419422618924.34 & I_{xy} &= 203177765539.65 & I_{xz} &= 385154816648.52 \\ I_{yx} &= 203177765539.65 & I_{yy} &= 1258198207373.43 & I_{yz} &= 568638702874.96 \\ I_{zx} &= 385154816648.52 & I_{zy} &= 568638702874.98 & I_{zz} &= 439383091538.45 \end{aligned}$$

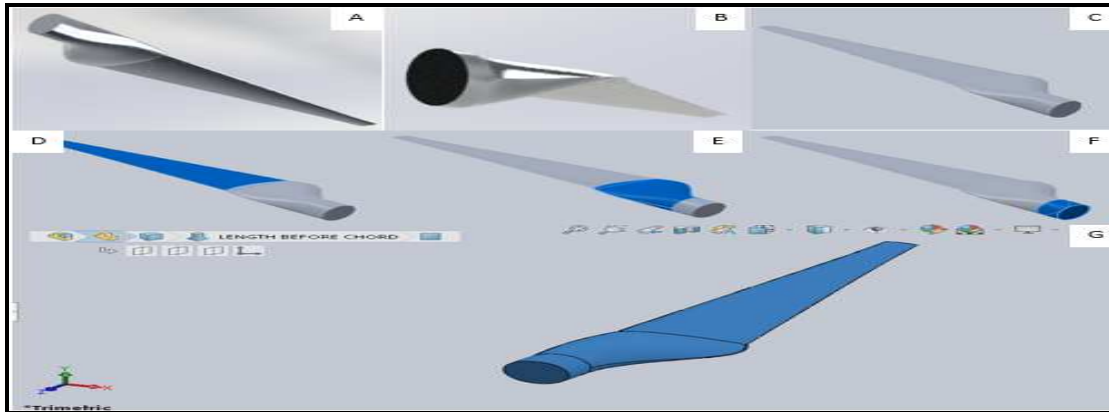


Figure 3: Shows the Different views of the AL6061 Alloy Wind Turbine Blade with some Selected Part. (a) The 3D Rendered View, (b) Bottom/Hallow View, (c) The Front View, (d) The Length of the Blade before the Chord, (e) Blade Chord, (f) The Extruded Hub, (g) The Complete Section of the Blade

### 3. RESULT AND DISCUSSIONS

The simulation analysis is carried out on two forces applied, such as 1 N and 5 N, and the resultant force for 1N and the 5 N is displayed in Table 2a-2c. Having a reaction moments of zero N/m. Table 3 and Figure 4 shows the mesh information and the model of the wind turbine blade.

Table 2a: Loads and Fixtures of the Simulation Analysis

Fixture name	Fixture Image	Fixture Details	
Fixed-1		Entities	1 face(s)
		Type	Fixed Geometry

Table 2b: Resultant Forces for 1 N

Components	X	Y	Z	Resultant
Reaction force(N)	-0.0115309	0.873136	-0.0529517	0.874816
Reaction Moment(N/m)	0	0	0	0


Table 2c: Resultant Forces for 5 N

Components	X	Y	Z	Resultant
Reaction force(N)	-0.0573635	4.36583	-0.264575	4.37422
Reaction Moment(N/m)	0	0	0	0

Table 3: Presenting the Mesh Information in Details

Total Nodes	15915
Total Components	9045
Maximum Characteristic Ratio	1797.8


% of components with Aspect Ratio < 3	79.3
% of components with Aspect Ratio > 10	9.21
% of inaccurate components(Jacobian)	0
Time to complete mesh (hh:mm:ss):	00:00:02
Tolerance:	0.00185432 m
Component Size:	0.0370863 m
Mesh Superiority:	High
Jacobian points:	4 Points

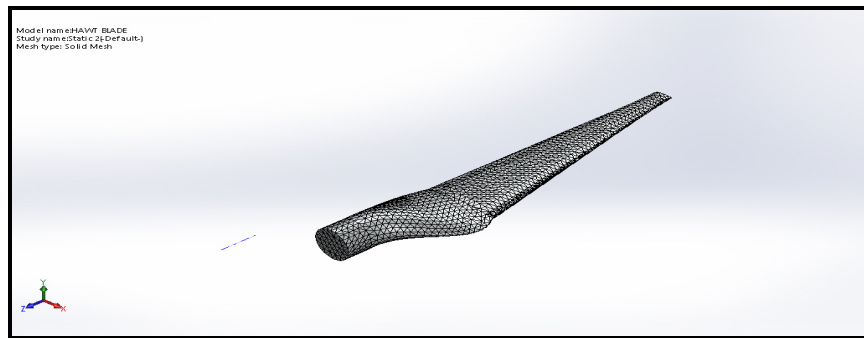

**Figure 4: The Model of the Wind Turbine Blade**

Figure 5 shows the analysis of the stress via the simulation approach. The stress effect of the 1 N and 5 N loads applied on the wind blade, it can be seen that the maximum stress of  $285.377 \text{ N/m}^2$  occurs at the root of the wind blade. This has proven that the thermal and mechanical load affects the wind turbine blade during its operations. Figure 6 also presents the displacement analysis. From the result, the maximum displacement for the 1 N force applied is  $0.0000518 \text{ mm}$  and  $0.000259 \text{ mm}$  for the 5 N, which occurs at the tip of the wind blade. The displacement analysis is very significant in wind blade analysis due to the high humidity experienced by the wind blade during operations.

From this analysis, it can be noted that as the forces and pressures increase, the failure rate of the blade increases. The wind blade design must be carried out with caution and with high safety of factor. The model most considered the environmental conditions of the site where the wind turbine will be installed and also with suitable materials.

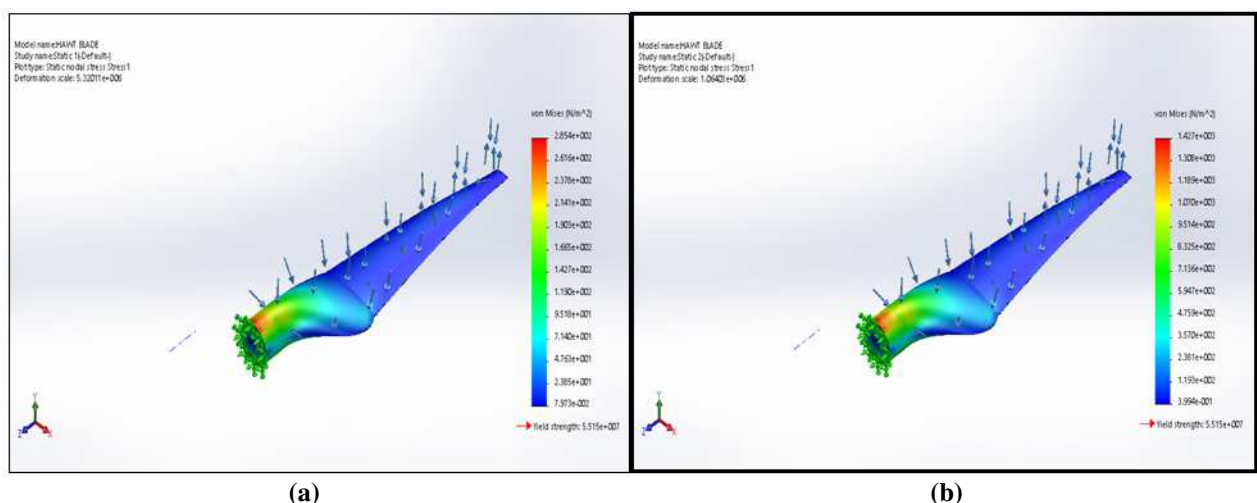

**Figure 5: The Stress Analysis of the Wind Turbine Blade (a) 1 N and (b) 5 N**



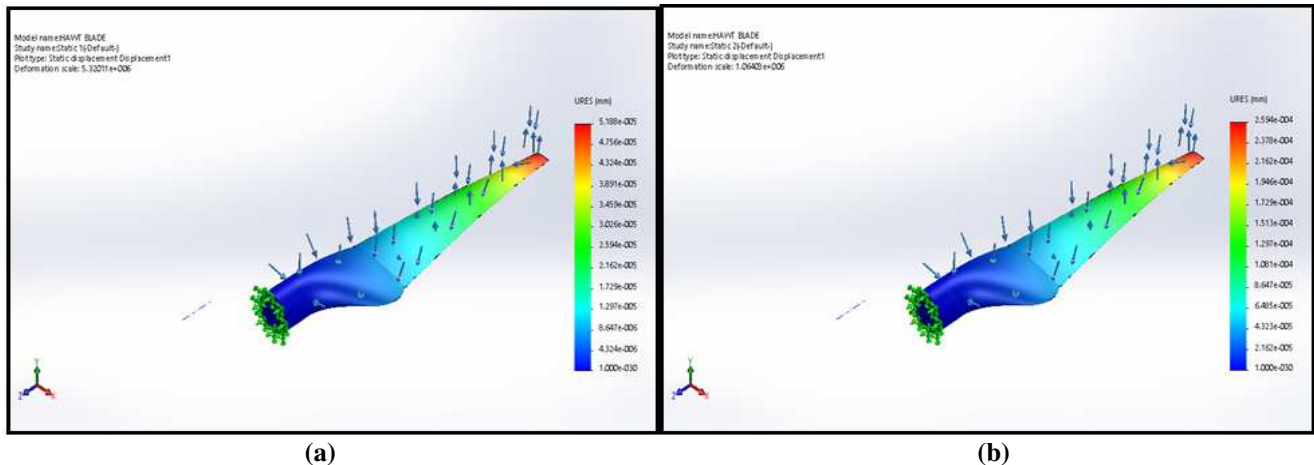


Figure 6: The Displacement Analysis of the Wind Turbine Blade (a) 1 N and (b) 5 N

Figure 7(a-b) and 8(a-b) shows the simulation analysis of the von Mises and the ESTRN. It is seen that the strain effect on the wind turbine blade causes elongation, which is attributed to the different force and pressure affecting the wind blade. This force and pressure are vibration, high temperature, contraction, and thermal expansion process. In this analysis, the maximum strain for both forces applied is  $3.55281 \times 10^{-9}$  and  $1.77642 \times 10^{-8}$ , respectively. Figure 8a and 8b presents the wind blade experience massive displacement, stress, and strain at the centre region of the blade. This has shown that the maximum failure occurs in this region due to various elemental factors faced by the wind blade.

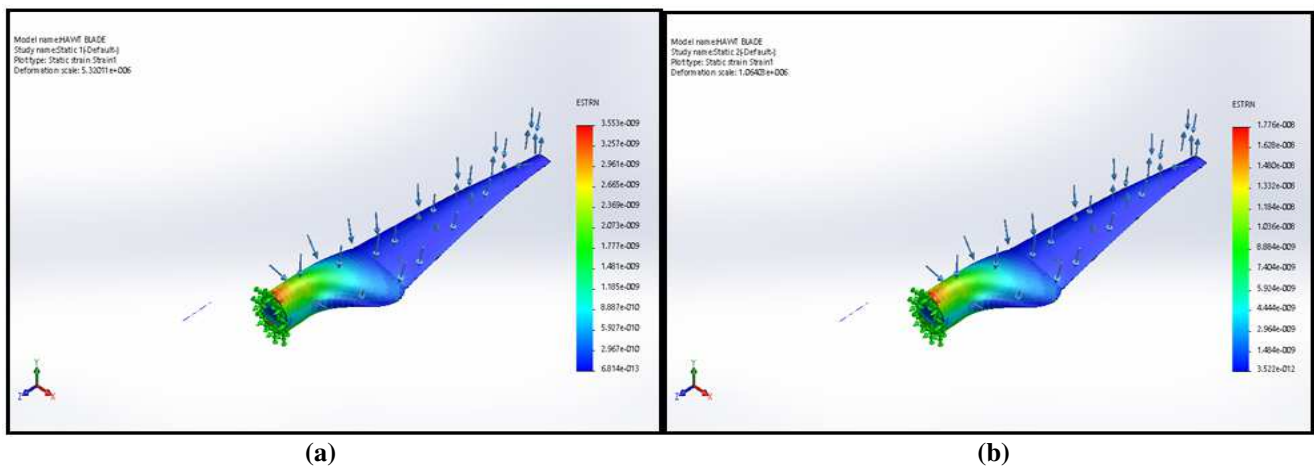


Figure 7: The Analysis of the Strain (a) 1 N (b) 5 N Forces Applied

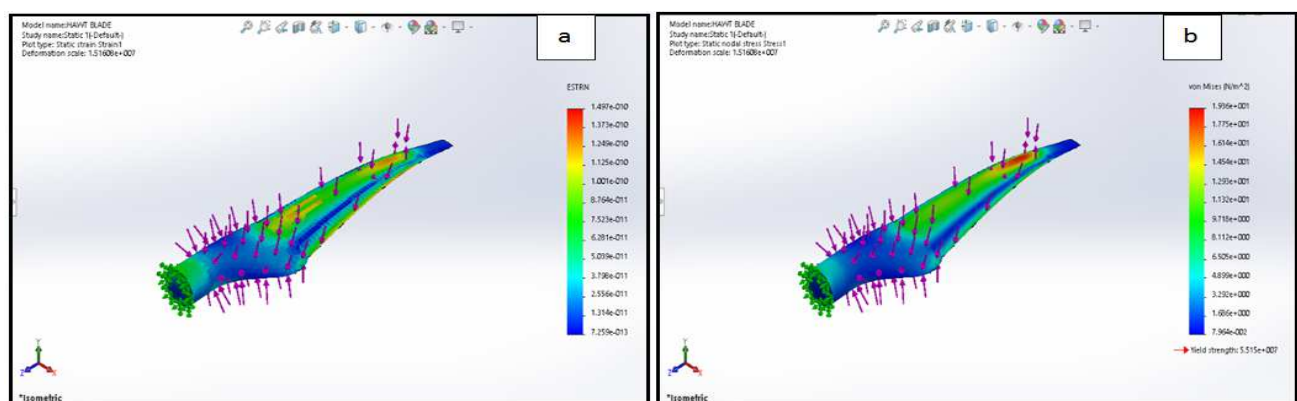


Figure 8: The Simulated Result showing the Possible area where the Failure of the Wind Turbine Blade can Occur during Operations (a) at 1 N and (b) at 5 N

#### 4. CONCLUSIONS

The optimal design and the simulation analysis of stress/ strain of the wind turbine blade was carried out to study the effects of different forces and pressure on the wind turbine blade via a simulation approach. The design and simulation software employed in this study is Solid Works Visualize 2018. The wind turbine blade is made of AL6061 alloy material. The blade is simulated under two forces, 1 N, and 5 N and pressure at zero degree, the maximum stress that causes the blade to experience failure during operation occurs at 285.377 N/m<sup>2</sup> and 1426.83 N/m<sup>2</sup> respectively. The result from the simulation analysis shows that high failure rate occurs at the tip of the wind blades, due to the displacement force acting on it. The simulation result also shows that the wind blade experiences elongation at the middle of the blade due to the strain forces been acted upon the blade. From this study, the blade maintenance can also be carried out if the failure is detected on time, by using an additive manufacturing process in restructuring the material of the blade, which help to prolong the lifespan of the blade for optimal performance during energy generation.

#### 5. ACKNOWLEDGMENT

The authors do appreciate Covenant University management for their support during this paper publication process

#### REFERENCES

1. Hassanzadeh A, Hassanabad AH, Dadvand A. Aerodynamic shape optimization and analysis of small wind turbine blades employing the Viterna approach for the post-stall region. *Alexandria Engineering Journal*. 2016 Sep 1;55(3):2035-43.
2. El Mouhsine S, Oukassou K, Ichenial MM, Kharbouch B, Hajraoui A. Aerodynamics and structural analysis of wind turbine blade. *Procedia Manufacturing*. 2018 Jan 1; 22:747-56.
3. Schubel PJ, Crossley RJ. Wind turbine blade design. *Energies*. 2012 Sep 6;5(9):3425-49.
4. Wang H, Ma B, Ding J, Li S. The Modeling and Stress Analysis of Wind Turbine Blade. *TELKOMNIKA Indonesian Journal of Electrical Engineering*. Vol.12, No.6, June 2014, pp. 4178 ~ 4183. DOI: 10.11591/telkommnika. v12i6.5536
5. Tang X, Huang X, Peng R, Liu X. A direct approach of design optimization for small horizontal axis wind turbine blades. *Procedia CIRP*. 2015 Jan 1; 36:12-6.
6. Dunmade I, Udo M, Akintayo T, Oyedepo S, Okokpujie IP. Lifecycle impact assessment of an engineering project management process—a SLCA approach. In *IOP Conference Series: Materials Science and Engineering 2018 Sep* (Vol. 413, No. 1, p. 012061). IOP Publishing.
7. Okokpujie IP, Okokpujie KO, Nwoke ON, Azeta J. Design and Implementation of 0.5 kw Horizontal Axis Wind Turbine for Domestic Use. In *Proceedings of the World Congress on Engineering 2018 Jul 6* (Vol. 2).
8. Okokpujie IP, Akinlabi ET, Okonkwo UC, Babaremu KO, Okokpujie KO. Experimental Evaluation, Modeling, and Optimaztion of a 500 W Horizontal Wind Turbine Using Definitive Screen Design Method for Sustainable Wind Power Generation. *International Journal of Civil Engineering and Technology*. 2019;10(1):2415-31.
9. Okokpujie IP, Okokpujie KO, Nwoke ON, Azeta J. Development of a 0.5 KW Horizontal Axis Wind Turbine. *Journal of Engineering and Applied Sciences*. 2018 Jun 10;13(8):2202-8.
10. Odia OO, Ososomi SA, Okokpujie PI. Practical Analysis of a Small Wind Turbine for Domestic Use on Latitude 7.0670 N, Longitude 6.2670 E. *Journal of Research in Mechanical Engineering*. 2016 Jul 26;2(11):8-10.
11. Thumthae C. Optimum Blade Profiles for a Variable-Speed Wind Turbine in Low Wind Area. *Energy Procedia*. 2015 Aug 1; 75:651-7.



12. Nada AA, Al-Shahrani AS. *Shape Optimization of Low-Speed Wind Turbine Blades using Flexible Multibody Approach. Energy Procedia.* 2017 Oct 1; 134:577-87.
13. Hosseini SF, Moetakef-Imani B. *Innovative approach to computer-aided design of horizontal axis wind turbine blades. Journal of Computational Design and Engineering.* 2017 Apr 1;4(2):98-105.
14. Rafiee R, Tahani M, Moradi M. *Simulation of aeroelastic behavior in a composite wind turbine blade. Journal of Wind Engineering and Industrial Aerodynamics.* 2016 Apr 1; 151:60-9.
15. Ghasemi AR, Mohandes M. *Composite blades of wind turbine: Design, stress analysis, aeroelasticity, and fatigue. Wind turbines-design, control, and applications.* 2016 Jul 27:1-26.
16. Chehouri A, Younes R, Ilinca A, Perron J. *Wind turbine design: multi-objective optimization. Wind Turbines: Design, Control, and Applications.* 2016 Jul 27:121.
17. Okokpuije IP, Fayomi OS, Leramo RO. *The Role of Research in Economic Development. In IOP Conference Series: Materials Science and Engineering 2018 Sep (Vol. 413, No. 1, p. 012060). IOP Publishing.*
18. Jureczko ME, Pawlak M, Mężyk A. *Optimisation of wind turbine blades. Journal of materials processing technology.* 2005 Aug 30;167(2-3):463-471.
19. Drewczynski M, Rzadkowski R. *A stress analysis of a compressor blade in partially blocked inlet condition. Proceedings of the Institution of Mechanical Engineers, Part G: Journal of Aerospace Engineering.* 2016 Apr;230(5):934-952.
20. Soliman MS, El Rayes MM, Abbas AT, Pimenov DY, Erdakov IN, Junaedi H. *Effect of tensile strain rate on high-temperature deformation and fracture of rolled Al-15 vol% B4C composite. Materials Science and Engineering: A.* 2019 Mar 11; 749:129-136.
21. Ulriksen MD, Tcherniak D, Kirkegaard PH, Damkilde L. *Operational modal analysis and wavelet transformation for damage identification in wind turbine blades. Structural Health Monitoring.* 2016 Jul;15(4):381-388.

## **AUTHORS PROFILE**



**Engr. (Mrs.) Okokpuije Imhade Princess**, is a Ph.D. researcher/lecturer in the Department of Mechanical Engineering Covenant University, Ota, Ogun State Nigeria. She is currently the Chief Editor to Covenant Journal of Engineering and Technology (CJET), she is also a reviewer to so many international/local journals and conferences. Her areas of research interest are Machine Design, Advanced Manufacturing such as Machining, Tool Wear, Vibration, and Nano-lubricant, Energy Systems, Mathematical Modeling, Optimization, Simulation, and also a Multi-Disciplinary Analysis. She is an active researcher who has authored/co-authored over 95 peer-reviewed publications. In 2017 to 2019 She was the technical secretary to the International Conference on Engineering for a Sustainable World (ICESW) index in Scopus and ISI data based through the IOPs publisher. She is a Registered Engineer of the Council for the Regulation of Engineering in Nigeria (COREN), a member of the Nigerian Society of Engineers (NSE), and Association of Professional Women Engineers of Nigeria (APWEN). She is currently the Vice-Chairman of APWEN Ota Branch in Ogun State. She is one of the top-rated researchers in her institution.



**Engr. Dr. (Mrs.) Elizabeth Jumoke Eterigho**, had her first and second degrees in Chemical Engineering. Second Master's degree in Industrial/Production Engineering and obtained her doctorate (Ph.D.) from Newcastle University. She is an academic staff of the Federal University of Technology, Minna in Niger State. Her areas of specialization are Industrial and Environmental Engineering, Catalysis, and Renewable Energy. She is a reviewer to several journals, and she has published over 68 papers from her research area in both Local and International Journals. She is a Registered Engineer with the Council for the Regulation of Engineering in Nigeria (COREN), a member of several professional bodies such as Nigerian Society of Engineers (NSE), Nigerian Society of Chemical Engineers (NSChE), Association of Professional Women Engineers of Nigeria (APWEN), Nigerian Institute of Procurement Engineers (NIProcE), International Association of Engineers (IAENG), Institute of Chemical Engineers (ICHEME). She has several skills such as Organisational skills, Managerial skills, Computer and analytical skills, Entrepreneurial and Administrative skills. A recipient of different awards, both National and International. She is an advocate of Girl Child Education. Presently she is the Chairman NSE Minna Branch and National Technical Secretary of APWEN.



**Mr. Aladegbeye Iyanuoluwa O.**, is a mechanical engineering graduate from Covenant University. He has vital knowledge of foundational areas in mechanical engineering such as machine drawing, mechanics of machines, manufacturing technology, fluid mechanics, and automotive engineering. He also possesses a wide range of soft skills which include but are not limited to active listening, communication adaptability and empathy. And also have intermediate-level proficiency in product design software like SolidWorks and Autodesk Inventor. He is a graduate member of the Nigerian Society of Engineers (NSE) and Nigerian Institute of Mechanical Engineers (IMechE).



**Engr. Kennedy Okokpujie**, holds a Bachelor of Engineering (B.Eng.) in Electrical and Electronics Engineering, a Master of Science (M.Sc.) in Electrical and Electronics Engineering, Master of Engineering (M.Eng.) in Electronics and Telecommunication Engineering and Master of Business Administration (MBA). He is currently on his Ph.D. in Information and Communication Engineering/ Lecturing with the Department of Electrical and Information Engineering at Covenant University, Ota, Nigeria. He is a member of the Nigeria Society of Engineers and the Institute of Electrical and Electronics Engineers (IEEE). His research areas of interest include Biometrics, Wireless Communication, and Digital Signal Processing. He is an active researcher who has authored/co-authored over 65 peer-reviewed publications.